


Paraflam®SEB is a non-combustible stonewool based product used to reinstate the fire resistance of wall and floor constructions, including ceiling cavities, slab edge voids and underfloor upgrades. Paraflam®SEB is has a foil facing which prevent fibre migration and provides an excellent smoke seal.

Paraflam®SEB is tested and Certified as part the FSi Fire Stopping range. Paraflam®SEB can be installed across a variety substrates including,

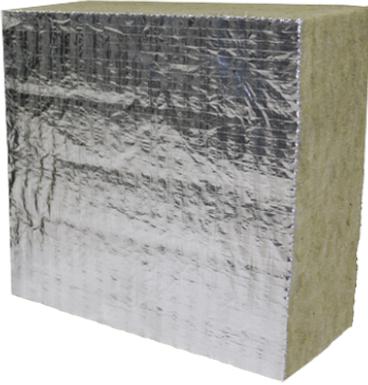

- Rigid Walls and Floors
- Aerated concrete, concrete
- Softwood
- Blank Openings
- Head of Walls

Areas of Use:

- To reinstate fire resistance through walls and floors
- Ceiling cavities
- Floor upgrades
- Slab edge voids
- Prevention of air leakage
- Maintains Acoustic performance
- Assumed working life 25 years
- For internal use

Certifications



APPROVED
CF5126

Advantages:

- Easy friction fit system
- Non-combustible
- Lightweight
- Testing in voids up to 500mm
- Good Acoustic performance
- Provides smoke seal.
- Manufactured and tested alongside the entire FSi Fire Stopping range in the UK.

Certification & Testing:


- Testing in accordance with EN1366-3:2009 – Fire Resistance
- Classified in accordance with EN13501-2 – Fire Resistance
- CE Marked – ETA 16-0763
- Certifire Accreditation – CF5126
- ULEU Accreditation
- Tested in accordance with EN10140-2:2010 – Airborne Sound
- Tested in accordance with EN1026:2000 – Air Permeability



Please refer to FSi Technical Data Sheets and Technical Manual for more information

Overview

Description	Result
Size	1200 x 600 x 100mm, 1200 x 600 x 75mm
Density of Stone	80kg/m ³
Thermal Conductivity	0.035W/mk
Conditioning	EOTA TR024 – Type X
Packaging	Green Fsi printed bag
Product Code	T12100-80 - 100mm, T1275-80 - 75mm
Shelf Life	N/A if stored in accordance with storage conditions.

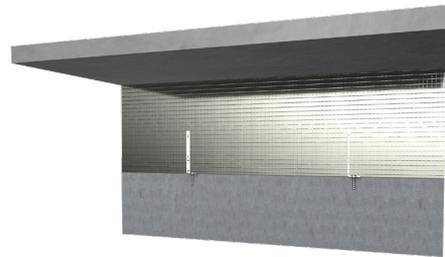

FSi has Technical Representatives who provide assistance in the selection and specification of FSi products. For more information, specification and technical advice please call our Head Office on Tel: +44 (0) 1530 515130. Guarantee / Warranty: FSi products are manufactured to rigid standards of quality. Any product which has been applied in accordance with FSi's written instructions and in any application recommended by FSi, but which is proved to be defective in product quality, will be replaced free of charge. No liability can be accepted for the information provided in this document although it is published in good faith and believed to be correct. FSi Limited reserves the right to alter product specifications without prior notice, in line with our Company policy of continuous development and improvement.